

ENVIRONMENTAL

| | |
|-------------------|----------------------------|
| Temperature Range | -40°C to 85°C |
| Humidity | Non-condensing 65°C 95% RH |

ELECTRICAL

| | |
|-------------------|------------------|
| Impedance | 50 Ω |
| Polarization | Linear |
| Radiation Pattern | Omni Directional |
| Input Power | 10W |


MECHNICAL

| | |
|------------------|--------|
| Antenna Length | 72mm |
| Antenna Diameter | 10mm |
| Casing | ABS |
| Connector | SMA(M) |
| Weigth | 8.2g |

BOM

| NO | Name | Material | Finish | QTY |
|----|----------|----------|--------|-----|
| 1 | SMA Male | BRASS | NI | 1 |
| 2 | Base | ABS | BLACK | 1 |
| 3 | Hinge | BRASS | NI | 1 |
| 4 | Whip | ABS | BLACK | 1 |
| 5 | ANTENNA | BRASS | | 1 |

THIRD ANGLE PROJECTION



Tolerance
 . X ±0.1
 . XX ±0.05
 . x ±1°


DRAWN BY li MATERIAL: PART NO: D410.C2.0.999

CHECKED BY FINISH: TITLE: 3G/4G/5G Antenna

APPROVED BY King UNIT: mm

DATE: 20.7.13 SCALE: 1/1



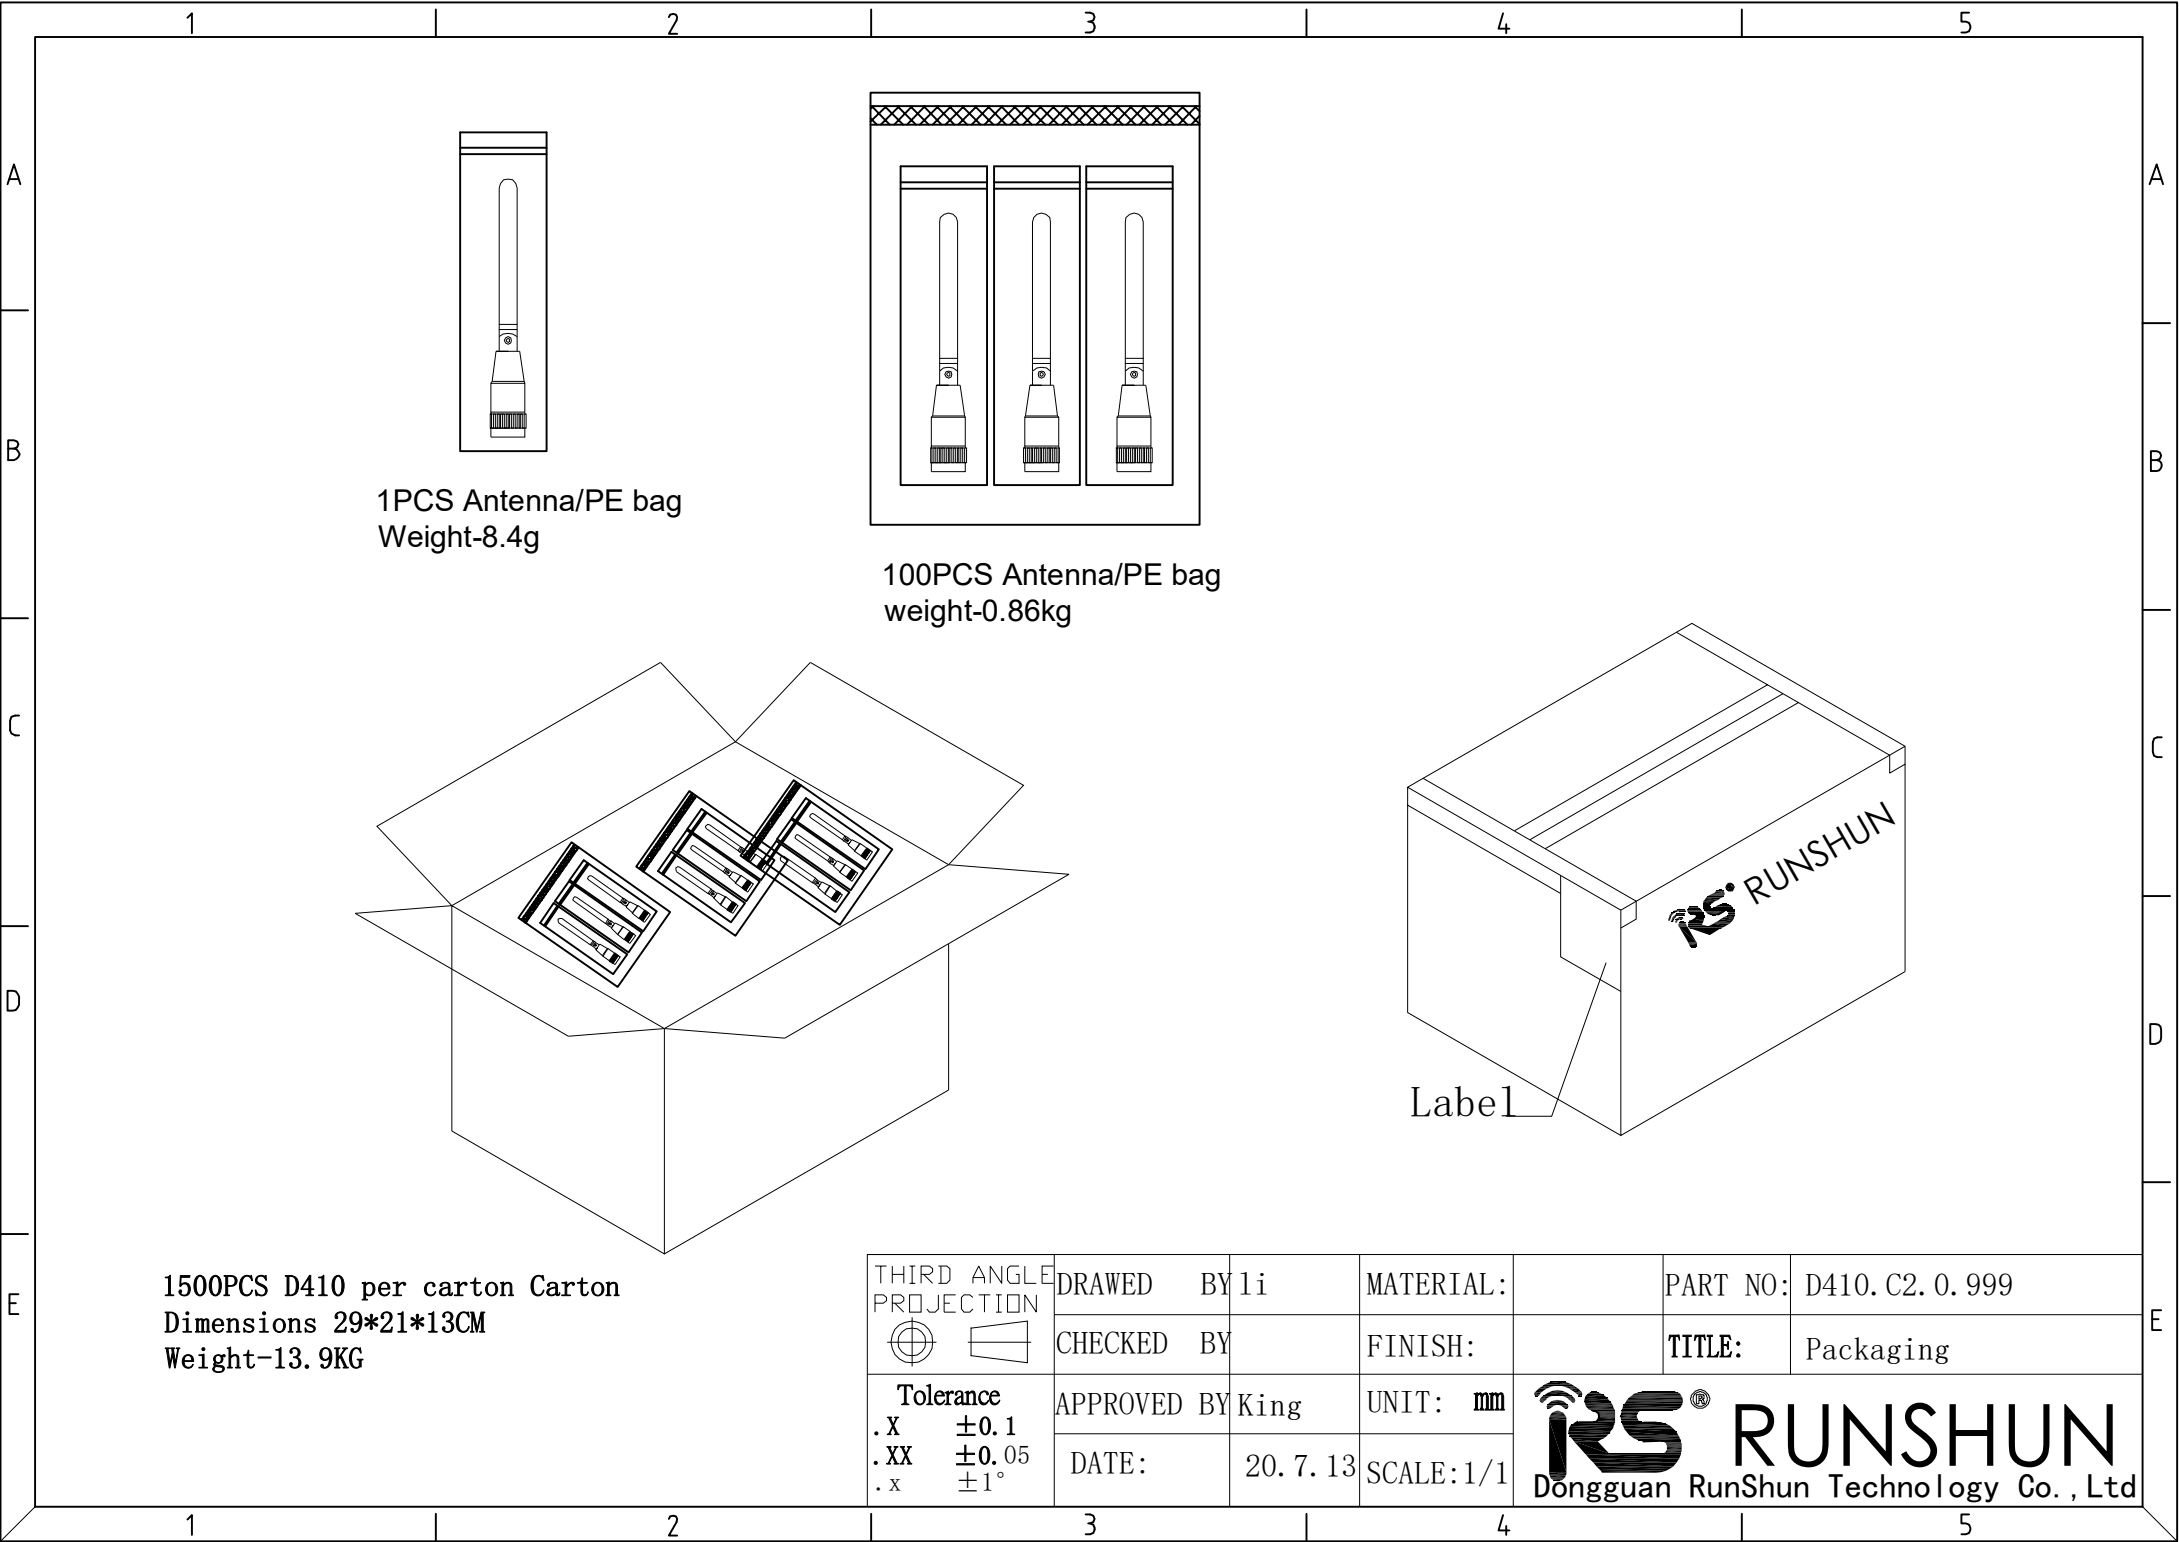



1PCS Antenna/PE bag
Weight-8.4g

100PCS Antenna/PE bag
weight-0.86kg

1500PCS D410 per carton Carton
Dimensions 29*21*13CM
Weight-13.9KG


Label

| | | | | |
|---|------------------|------------|---|--|
| THIRD ANGLE PROJECTION  Tolerance .X ±0.1 .XX ±0.05 .x ±1° | DRAWN BY li | MATERIAL: | PART NO: D410.C2.0.999 | |
| | CHECKED BY | FINISH: | TITLE: Packaging | |
| | APPROVED BY King | UNIT: mm |  Dongguan RunShun Technology Co., Ltd | |
| | DATE: 20.7.13 | SCALE: 1/1 | | |



Trc1 — S11 dB Mag 10 dB/ Ref 0 dB Cal Mem3[Trc1] — S11 dB Mag 10 dB/ Ref 0 dB

1

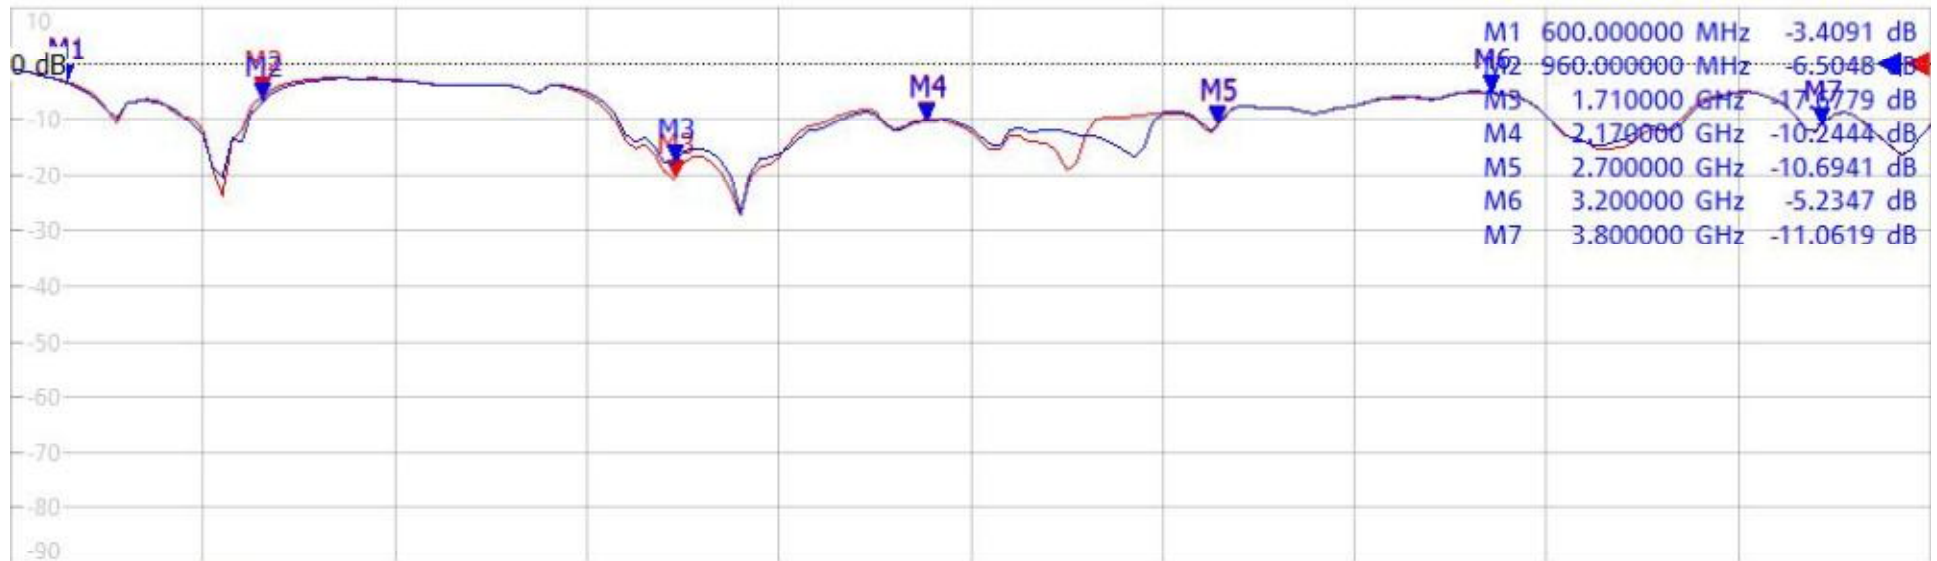

Ch1 Start 500 MHz Pwr -10 dBm Bw 10 kHz Stop 4 GHz

Trc2 — S11 SWR 1 U/ Ref 1 U Cal Mem4[Trc2] — S11 SWR 1 U/ Ref 1 U

2



Ch1 Start 500 MHz Pwr -10 dBm Bw 10 kHz Stop 4 GHz

